

KSB5516



KSB5516 MYLAR EXTENSION SPEAKER

Our ever popular 16 Ohm Extension Speaker utilised as an internal sounder in literally millions of security systems worldwide.


Sleek and attractive low profile casing in ABS this unit is compatible with the vast majority of Alarm Control Panels and has the option of two way anti-tamper microswitch

Outstanding Features:

- Internal Mylar Cone Extension Speaker
- 16 Ohm impedance, 12Watt max. power
- Attractive low profile casing in ABS
- Wall mount back-plate
- Optional two-way anti-tamper microswitch
- Grade3 compliant with MS option
- Compatible with vast majority of Control Panel & integrates seamlessly into any security system regardless of grading requirement

KSB5516

Diagrammatic layout

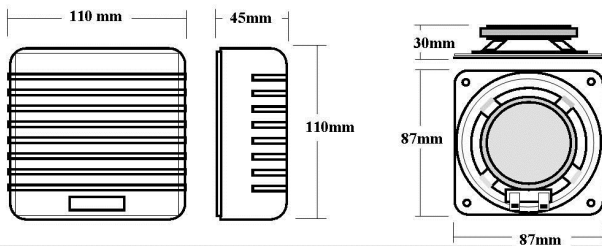

SPECIFICATION	KSB5516	KSB5516MS
Speaker	Mylar Cone	Mylar Cone
Coil Impedance	16 Ohm	16 Ohm
Maximum Power	12 Watt	12 Watt
Frequency Range	6 Khz	6 Khz
Dimensions	110 mm (W) x 110 mm (H) x 45 mm (D)	
Colour	White	White
Casing Finish	ABS	ABS
Tamper	—	Microswitch - Wall / Lid
Grade	2	3
Grade	3 : Provided it is not used as the primary signalling device	

